

XETRON
XHN SERIES
SUPPORT MANUAL

NOVEMBER 1992

GENERAL DESCRIPTION

The XHN/XCN series of xenon systems, manufactured and designed by Xetron Division, Neumade Products Corp. has been designed to take advantage of the higher efficiency that can be obtained by using a xenon bulb in the horizontal position. In order to make a trouble-free reliable unit, special attention has been paid to the cooling of the bulb and reflector. A circuit board control panel (XCN227) having a combination digital volt/amp meter and digital hour meter is provided for high accurate readings.

The metal reflector is computer designed and optically corrected for this application, and provides a very efficient collection of the energy developed by the Xenon bulb. To facilitate proper cooling, the reflector is coaxially mounted in a metal spinning with air being forced between the outside of the reflector and the inside of the spinning. The 1K, 2K and 3K systems are equipped with either the 10" XH260-20 or 11" XH300-159 Aconic reflector design. The 4K systems are equipped with a 15" reflector design.

All systems must be vented. The XHN lamphouse systems 1-4K are supplied with a 6" vent stack opening. The XCN and XCND consoles systems have a 8" vent stack opening. The systems have direct cooling on both the positive and negative ends of the bulb.

All systems have various failsafe devices to protect both operating personnel and the equipment. The basic unit blower has a air vane switch which will not allow the power supply to turn on unless operational. Each door has a keylock switch to ensure that the doors are closed during operation.

Most xenon bulbs will fit in our various systems. The recommended type of bulb in the various sizes are as follows:

XBO1000HS	XBO1600HS	XBO2000H
XBO3000HS	XBO4000HS	XBO7000HS

XETRON
XHN SERIES
SUPPORT MANUAL

NOVEMBER 1992

RELATIONAL BULB SIZE
TO SCREEN SIZE CHART

<u>SCREEN WIDTH</u>	<u>SCREEN HIGHTH</u>	<u>BULB SIZE</u>
TO 30'	TO 15'	2000 WATT
TO 38'	TO 20'	3000 WATT
TO 50'	TO 26'	4000 WATT

The above figures are only rough guides. Many factors should be considered when calculating the correct xenon bulb for a particular auditorium. Besides screen size, the type of projector, lens type, type of port hole glass and projection throw should be considered when specifying a particular system.

VENTILATION REQUIREMENTS AT THE VENT STACK

<u>LAMPHOUSE SIZE</u>	<u>RECOMMENDED</u>
	<u>CFM</u>
1000-2000W	400
3000W	500
4000W	600
7000W	750

The above figures are minimum requirements. Excessive heat will effect many things. The Xenon bulb life will be cut dramatically without proper cooling. Also the dichroic coating on the reflector will fail if reflector surface temperature exceeds 280 C.

The following page lists various reference temperatures of our various lamphouses operating with the above ventilation specifications.

XETRON
XHN SERIES
SUPPORT MANUAL

NOVEMBER 1992

MAXIMUM OPERATING TEMPERATURES WITH ABOVE COOLING

<u>CURRENT</u> <u>VOLT/AMP</u>	<u>WATTS</u>	<u>REFLECTOR</u>	<u>NOSE CONE</u> <u>PANEL</u>	<u>DOOR</u> <u>HANDLES</u>
XHN2KD				
28.5/62	1767	115 C	32 C	42 C
28.9/75	2167	123 C	34 C	48 C
30.7/85	2609	146 C	47 C	57 C
XHN3KD (SHROUD)				
27.5/85	2337	136 C	33 C	51 C
28.5/95	2707	191 C	34 C	56 C
30.4/110	3344	223 C	37 C	67 C
XHN3KD (NO SHROUD)				
28.8/105	3024	134 C	33 C	56 C
30.4/110	3344	165 C	37 C	67 C

All temperature readings done with the hand dowser closed.

WORKING DISTANCE MEASUREMENTS

		REAR OF REFLECTOR TO PROJ. APERTURE
XH26020	10" REFLECTOR	19.5"
XH26020CD		
XH300159	11" REFLECTOR	20.5"
XH300160		
XH460RM	15" REFLECTOR	31.15"
XH460CD		

If the type of projector was stated on the order, the basic unit will be preset for the proper working distance using normal projector mounting practices.

XETRON
XHN SERIES
SUPPORT MANUAL

NOVEMBER 1992

BULB ADAPTER CHART

1-3K LAMPHOUSE WITH 10" REFLECTOR

<u>XENON BULB</u>	<u>POSITIVE ADAPTER</u>	<u>NEGATIVE ADAPTER</u>
XBO1000HS	XH3007527	XH3007521
XBO1000HTP	XH3007526	XH300752
XBO1600HS	XH3007527	XH3007521
XBO2000H		XH3007522
XBO2000HS	XH3007527	XH3007522
XBO2000HTP		XH3007523
XBO2500HS	XH3007528	XH3007524
XBO3000HS	XH3007528	XH3007524
XBO3000HTP		XH3007525

1-3K LAMPHOUSE WITH 11" REFLECTOR

XBO1000HS	XH3007527	XH3007521
XBO1600HS	XH3007527	XH3007521
XBO2000H		XH3007522
XBO2000HS	XH3007527	XH3007521
XBO2500HS	XH3007528	XH3007524
XBO3000HS	XH3007528	XH3007524

4K LAMPHOUSE WITH 15" REFLECTOR

XBO2000H	XH3007547	XH3007548
XBO2500HS	XH3007545	XH300754
XBO3000HS	XH3007545	XH300754
XBO3000HTP	XH3007546	XH3007542
XBO4000HTP	XH3007546	XH3007543
XBO4000HS		XH3007544
XBO7000HS		XH3007544

INSTALLATION INSTRUCTIONS

1. Upon receipt of the product, inspect for damage. If noted, please state on the shipping paperwork and call local dispatcher for instructions.

2. Unpackage the equipment. If XHN system, you will normally have 3 boxes. One box will contain the power supply, one will contain the lamphouse, with the third having the accessories. The XCN & XCND will have 2 boxes.

The accessory box will contain the following: manual, face mask, bulb adjustment allen wrenches.

3. After unpacking product, again inspect for damage. If damage was concealed please contact carrier at once.

Once these steps are taken, installation of the lamphouse may proceed.

4. The lamphouse has parallel rails for easy mounting on the domestic type of pedestal. Once the lamphouse is on the pedestal, attach with a couple of bolts so the unit doesn't fall.

5. After mounting the projector and/or lamphouse, the next step is physical alignment between the lamphouse basic unit and the projector gate. There are many different ways to accomplish the same results from use of a laser to using the naked eye. Whatever the method used, final results are not in until actual light is projected onto a screen.

The goal of the physical alignment is to center the rear aperture of the reflector with the projector aperture. You will not know how accurate you are until light is thrown through the system.

6. Once physical alignment is complete, proceed with the electrical hookup of the lamphouse and power supply.

ELECTRICAL INSTALLATION
LAMPHOUSE /POWER SUPPLY

1. Reference Schematic XH-300-189.

The D.C inputs should be wired with #4 welding cable for 1K-3K Lamphouses. 4K Lamphouses should be wired with #2 welding cable.

The A.C lamphouse/power supply interface should be wired with #18 600V wire. When interfacing automations recommend using a twisted pair of shielded #18 600V cable. This should prevent any RF from the igniter talking to the automation.

2. Once wired, power up unit. You should here the basic unit blower switch on. Before installing the bulb, push the manual strike toggle switch. You should here the igniter strike. Now install the xenon bulb after turning off power.

3. The basic unit is designed with a number of bulb adjustments as well as working distance adjustments. The adjustments are preset at the factory for initial lamphouse alignment (center of their travel). For ease of bulb installation, the basic unit will swing towards the operator.

Insert the negative end (small electrode) of the bulb in the rear ball socket and the positive end will sit in a front Y-post assembly. Once in place, tighten the (2) set screws in the rear ball socket assembly and attach the bulb cable to the block bracket adjoining the positive post.

WHEN INSTALLING THE 3000 OR 4000 WATT BULBS, IT IS MOST IMPORTANT THAT ONE OF THE OPENINGS (PLUS MARKS, ROUND HOLES, ETC.) IN THE METAL NECK OF THE POSITIVE END IS AT THE BOTTOM SO THAT MAXIMUM COOLING IS OBTAINED.

OPERATION

With the bulb installation completed, set the auto/manual switch in the manual position, and turn ON the ON/OFF switch on the lamphouse. This operates the magnetic contactor the power supply. If you do not here the contactor pull in, check the door switches and air vane switches. Check voltmeter for proper polarity. Now push the manual pushbutton for ignition, set amperage at low setting depending on bulb size.

FINAL OPTICAL ALIGNMENT

With the projector running and no lense, you should now be viewing a white light with a series of concentric circles and a black center. If the round black pattern in the center of the screen seems to be symmetrical, but not centered, then the lamphouse/projector alignment is out. Once centered, concentrate on the round black pattern in the center of the screen. If the pattern is egg shaped, move the horizontal and vertical controls until a concentric black center appears. Please take note if the controls end up at an extreme position. If so check your alignment. Also if you notice light distortion in a particular quadrant, that indicates misalignment.

To confirm alignment, insert the lens, and projecting 10 seconds on and 10 seconds OFF without projector running, look at the picture. You should have a bright center with 4 dark corners. To flatten field, move the focus control adjustment until the 4 dark corners disappear. Raise the current level of the power supply an operating level of 14 to 18 footlamberts.

Once this has been accomplished, your lamphouse is now operational.

TROUBLE SHOOTING GUIDE

1. Xenon Bulb will not ignite.
 - A. Turn Power Switch Off & On, does power supply make clicking noise. If so, the power supply is on. If not, check power feed breakers, the door switches and basic unit blower air vane switch. Try again.
 - B. Power Supply is on. Push manual ignition button. Does the bulb try and light. If not, push the volt/amp button to the volt position. What does it read. If it reads below 85 Volts, most likely the problem lies either at the power supply or at the DC termination. Please consult the power supply section for further information. If it reads voltage, check the igniter circuit for bad connection or defective igniter.
 - C. If the bulb tries to ignite. Turn up the amperage on the power supply and try again. If not, replace the bulb. Before re-igniting, turn the power supply down to the low current range of the xenon bulb.
2. The following items are all fused. If one fails to operate, please check the fuse first.
 - Blower
 - Igniter
 - Pilot lamp
3. Hour Meter is not functioning properly.
 - A. If the meter is dim or out, change the battery.
 - B. If that doesn't correct problem, change meter.
4. Xenon bulb flicker.
 - A. Change bulb
 - B. Check power supply for single phase condition, bad diode or high in rush current.
 - C. Check magnetic stabilization on the reflector
5. OverHeating Projection Gate
 - A. Defocus lamp
 - B. Check reflector type and xenon bulb operating current
 - C. Check projector cooling method (air &/or water)
 - D. Check Xenon bulb alignment



XETRON
XHN SERIES
SUPPORT MANUAL
4 - 7K SPECIAL SUPPLEMENT

NOVEMBER 1993

DIV. OF NEUMADE PRODUCTS CORP. Ten Saddle Rd, Cedar Knolls, NJ 07927 U.S.A. Telephone (201) 267-8200

SPECIAL FEATURES OF NEW DESIGN 4000 TO 7000W LAMPHOUSE

This new lamphouse is the evolution of several years of engineering refinement of our standard lamphouse series. This new series is designed specifically for use of higher wattage lamps and large film applications. Special attention has been directed towards the cooling system, inside heat shielding, and operating ease.

COOLING SYSTEM

The cooling system represents a total redesign in an effort to provide as much air as possible over the entire bulb and cool all the reflector surfaces. A new larger capacity basic unit blower, with an outside air intake, and stronger lamphouse exhaust fan insure a fresh, cool supply of moving air at all times. Additionally, the noise level has also been reduced by a considerable margin. New inner heat-shields protect the outer surfaces from any heat build-up, and the bottom of the lamphouse has additional openings for additional air movement. It is most critical that all cooling openings be clean and unhindered at ALL times, to prevent air restriction, and lamphouse overheating which can result in damage to inside components. The new exhaust stack diameter is 10" and should be connected to an evacuation system via 10" ducting. It is most important to have no restrictions in the exhaust system.

OTHER SPECIAL FEATURES

The BASIC UNIT has also been redesigned. The lamp adjustment plate has been moved to the top of the central tower, while maintaining the original lamp position. Three axis lamp adjustments are still provided, and can be ordered with external adjustment capability via cables or motorized control. There is also a replaceable plate for positioning the positive lamp mount depending on the bulb to be used for an application. Listed below are the available plates and their applications:

4000W	XCN - 375
5-6000W	XCN - 397
7000	XCN - 376

(please check with XETRON for specific lamp, plate, and reflector applications)

A new DOWSER BLADE MATERIAL allows for long periods of operation with the dowser closed, with no damage to the dowser. A motor drive can be ordered.



XETRON
XHN SERIES
SUPPORT MANUAL
4 - 7K SPECIAL SUPPLEMENT

NOVEMBER 1993

DIV. OF NEUMADE PRODUCTS CORP. Ten Saddle Rd., Cedar Knolls, NJ 07927 U.S.A. Telephone (201) 267-8200


SPECIAL FEATURES (cont.)

Both cooling fans are protected by air vane switches, which constantly monitor their performance. A failure of either fan will result in an immediate shut-down of the bulb and power supply. An un-detected fan failure will result in catastrophic interior damage.

The open-frame REFLECTOR MOUNT allows for improved cooling on all surfaces of the reflector, and allows for easier reflector replacement.

The lamphouse body itself incorporates new construction techniques that result in fewer pieces, less weight and complexity, and better appearances.

Many of the features incorporated in this lamphouse will also be eventually added to our standard 1000 to 3000W lamphouses.

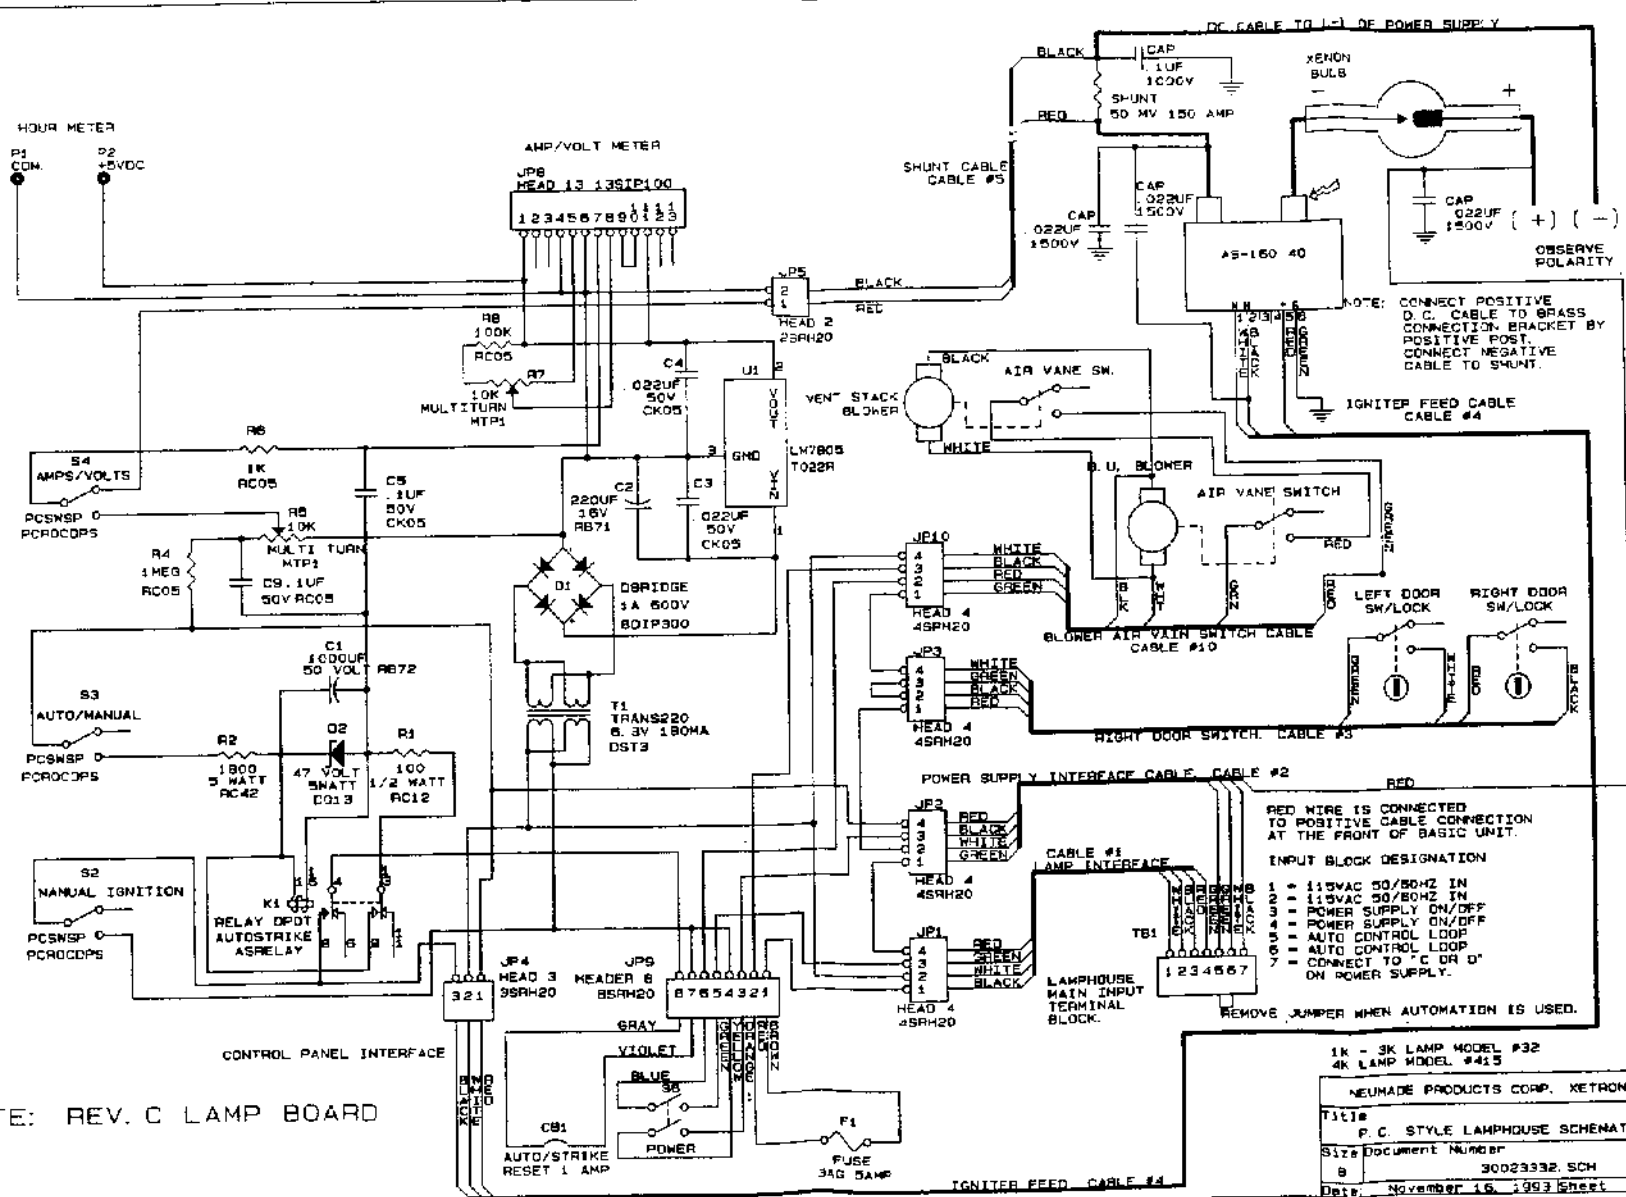

NOTE: REV. C LAMP BOARD

NOTE: CONNECT POSITIVE D.C. CABLE TO BRASS CONNECTION BRACKET BY POSITIVE POST. CONNECT NEGATIVE CABLE TO SHUNT.

RED WIRE IS CONNECTED TO POSITIVE CABLE CONNECTION AT THE FRONT OF BASIC UNIT.

INPUT BLOCK DESIGNATION

- 1 = 115VAC 50/60HZ IN
- 2 = 115VAC 50/60HZ IN
- 3 = POWER SUPPLY ON/OFF
- 4 = POWER SUPPLY ON/OFF
- 5 = AUTO CONTROL LOOP
- 6 = AUTO CONTROL LOOP
- 7 = CONNECT TO 'C OR 'D ON POWER SUPPLY.

1K - 3K LAMP MODEL #32
4K LAMP MODEL #415
NEUMADE PRODUCTS CORP. XETRON DIVISION

Title#	P.C. STYLE LAMPHOUSE SCHEMATIC 4K/7K	REV
Size	Document Number	A
8	30023332.SCH	
Date	November 16, 1993	Sheet 1 of 1

HOOR METER

AMP/VOLT METER

P1 COM.
P2 15VDC

J98
HEAD 3 135IP100
1 2 3 4 5 6 7 8 9 10 11 12 13

SHUNT CABLE
CABLE #5

S4
AMPS/VOLTS
PC5VSP
PC4DCPS

S3
AUTO/MANUAL
PC5VSP
PC4DCPS

S2
MANUAL IGNITION
PC5VSP
PC4DCPS

RELAY DPDT
AUTOSTRIKE
ASRELAY

J94
HEAD 3
35PH20

J95
HEADER 6
65PH20

J96
8 7 6 5 4 3 2 1

J97
HEAD 4
45PH20

J98
HEAD 4
45PH20

J99
HEAD 4
45PH20

J100
HEAD 4
45PH20

J101
HEAD 4
45PH20

J102
HEAD 4
45PH20

J103
HEAD 4
45PH20

J104
HEAD 4
45PH20

NOTE: REV. C LAMP BOARD

C81
AUTO/STRIKE
RESET 1 AMP

S6
POWER

F1
FUSE
3AG 5AMP

CONTROL PANEL
INTERFACE

R4
1MEG
RC05

R5
10K
RC05

R6
1K
RC05

R1
100
1/2 WATT
RC12

R2
1000
5 WATT
RC42

R3
47 VOLT
5WATT
RC13

R7
10K
MULTITURN
MTP1

R8
10K
RC05

R9
10K
RC05

R10
10K
RC05

R11
10K
RC05

R12
10K
RC05

R13
10K
RC05

R14
10K
RC05

R15
10K
RC05

R16
10K
RC05

R17
10K
RC05

R18
10K
RC05

R19
10K
RC05

R20
10K
RC05

R21
10K
RC05

R22
10K
RC05

R23
10K
RC05

R24
10K
RC05

R25
10K
RC05

R26
10K
RC05

R27
10K
RC05

R28
10K
RC05

R29
10K
RC05

R30
10K
RC05

R31
10K
RC05

R32
10K
RC05

R33
10K
RC05

R34
10K
RC05

R35
10K
RC05

R36
10K
RC05

R37
10K
RC05

R38
10K
RC05

R39
10K
RC05

R40
10K
RC05

R41
10K
RC05

R42
10K
RC05

R43
10K
RC05

R44
10K
RC05

R45
10K
RC05

R46
10K
RC05

R47
10K
RC05

R48
10K
RC05

R49
10K
RC05

R50
10K
RC05

R51
10K
RC05

R52
10K
RC05

R53
10K
RC05

R54
10K
RC05

R55
10K
RC05

R56
10K
RC05

R57
10K
RC05

R58
10K
RC05

R59
10K
RC05

R60
10K
RC05

R61
10K
RC05

R62
10K
RC05

R63
10K
RC05

R64
10K
RC05

R65
10K
RC05

R66
10K
RC05

R67
10K
RC05

R68
10K
RC05

R69
10K
RC05

R70
10K
RC05

R71
10K
RC05

R72
10K
RC05

R73
10K
RC05

R74
10K
RC05

R75
10K
RC05

R76
10K
RC05

R77
10K
RC05

R78
10K
RC05

R79
10K
RC05

R80
10K
RC05

R81
10K
RC05

R82
10K
RC05

R83
10K
RC05

R84
10K
RC05

R85
10K
RC05

R86
10K
RC05

R87
10K
RC05

R88
10K
RC05

R89
10K
RC05

R90
10K
RC05

R91
10K
RC05

R92
10K
RC05

R93
10K
RC05

R94
10K
RC05

R95
10K
RC05

R96
10K
RC05

R97
10K
RC05

R98
10K
RC05

R99
10K
RC05

R100
10K
RC05

R101
10K
RC05

R102
10K
RC05

R103
10K
RC05

R104
10K
RC05

R105
10K
RC05

R106
10K
RC05

R107
10K
RC05

R108
10K
RC05

R109
10K
RC05

R110
10K
RC05

R111
10K
RC05

R112
10K
RC05

R113
10K
RC05

R114
10K
RC05

R115
10K
RC05

R116
10K
RC05

R117
10K
RC05

R118
10K
RC05

R119
10K
RC05

R120
10K
RC05

R121
10K
RC05

R122
10K
RC05

R123
10K
RC05

R124
10K
RC05

R125
10K
RC05

R126
10K
RC05

R127
10K
RC05

R128
10K
RC05

R129
10K
RC05

R130
10K
RC05

R131
10K
RC05

R132
10K
RC05

R133
10K
RC05

R134
10K
RC05

R135
10K
RC05

R136
10K
RC05

R137
10K
RC05

R138
10K
RC05

R139
10K
RC05

R140
10K
RC05

R141
10K
RC05

R142
10K
RC05

R143
10K
RC05

R144
10K
RC05

R145
10K
RC05

R146
10K
RC05

R147
10K
RC05

R148
10K
RC05

R149
10K
RC05

R150
10K
RC05

R151
10K
RC05

R152
10K
RC05

R153
10K
RC05

R154
10K
RC05

R155
10K
RC05

R156
10K
RC05

R157
10K
RC05

R158
10K
RC05

R159
10K
RC05

R160
10K
RC05

R161
10K
RC05

R162
10K
RC05

R163
10K
RC05

R164
10K
RC05

R165
10K
RC05

R166
10K
RC05

R167
10K
RC05

R168
10K
RC05

R169
10K
RC05

R170
10K
RC05

R171
10K
RC05

R172
10K
RC05

R173
10K
RC05

R174
10K
RC05

R175
10K
RC05

R176
10K
RC05

R177
10K
RC05

R178
10K
RC05

R179
10K
RC05

R180
10K
RC05

R181
10K
RC05

R182
10K
RC05

R183
10K
RC05

R184
10K
RC05

R185
10K
RC05

R186
10K
RC05

R187
10K
RC05

R188
10K
RC05

R189
10K
RC05

R190
10K
RC05

R191
10K
RC05

R192
10K
RC05

R193
10K
RC05

R194
10K
RC05

R195
10K
RC05

R196
10K
RC05

R197
10K
RC05

R198
10K
RC05

R199
10K
RC05

R200
10K
RC05

R201
10K
RC05

R202
10K
RC05

R203
10K
RC05

R204
10K
RC05

R205
10K
RC05

R206
10K
RC05

R207
10K
RC05

R208
10K
RC05

R209
10K
RC05

R210
10K
RC05

R211
10K
RC05

R212
10K
RC05

R213
10K
RC05

R214
10K
RC05

R215
10K
RC05

R216
10K
RC05

R217
10K
RC05

R218
10K
RC05

R219
10K
RC05

R220
10K
RC05

R221
10K
RC05

R222
10K
RC05

R223
10K
RC05

R224
10K
RC05

R225
10K
RC05

R226
10K
RC05

R227
10K
RC05

R228
10K
RC05

R229
10K
RC05

R230
10K
RC05